


ADSL LINE TRANSFORMERS

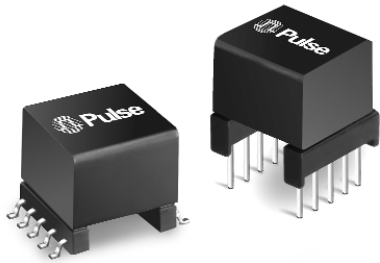

- Recommended by Analog Devices for use with their AD20msp918 ADSL Chipset
- Excellent THD performance in a small footprint
- Designed to UL1950 and EN60950 supplementary insulation requirements for working voltages up to 250 Vrms

Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

Part Number	Mounting	Turns Ratio (± 2%)	OCL @ 10 KHz, 0.1 V (MIN)		Leakage Inductance @ 100 KHz, 0.1 V (MAX) (1-4) with 2-3, 8-9, 10-7 shorted	Longitudinal Balance (30 KHz - 1.1 MHz)
			(1-4) with 2-3 shorted	(10-7) with 8-9 shorted		
B2104	THT	1:1.27	1.80	2.90	7.5 µH	50 dB MIN
B2105 ²	SMT	1:1.27	1.80	2.90	7.5 µH	50 dB MIN


Additional Specifications

Part Number	THD Typical (Linearity)	Load Resistance (Ω)	DC Resistance (1-4), (10-7)	Isolation Voltage (Vrms)	Insertion Loss ¹ (dB @ 100 KHz)
B2104	-80 dB @ 30 KHz	100	2 Ω MAX	1500	<0.5
B2105 ²		100	2 Ω MAX	1500	<0.5

¹ Frequency Response: ± 1.0 dB MAX, from 30 KHz to 1.1 MHz.

² Transformers are shipped in trays, unless Tape & Reel packaging is specified by adding the suffix "T" to this part number (B2105T)

Mechanicals

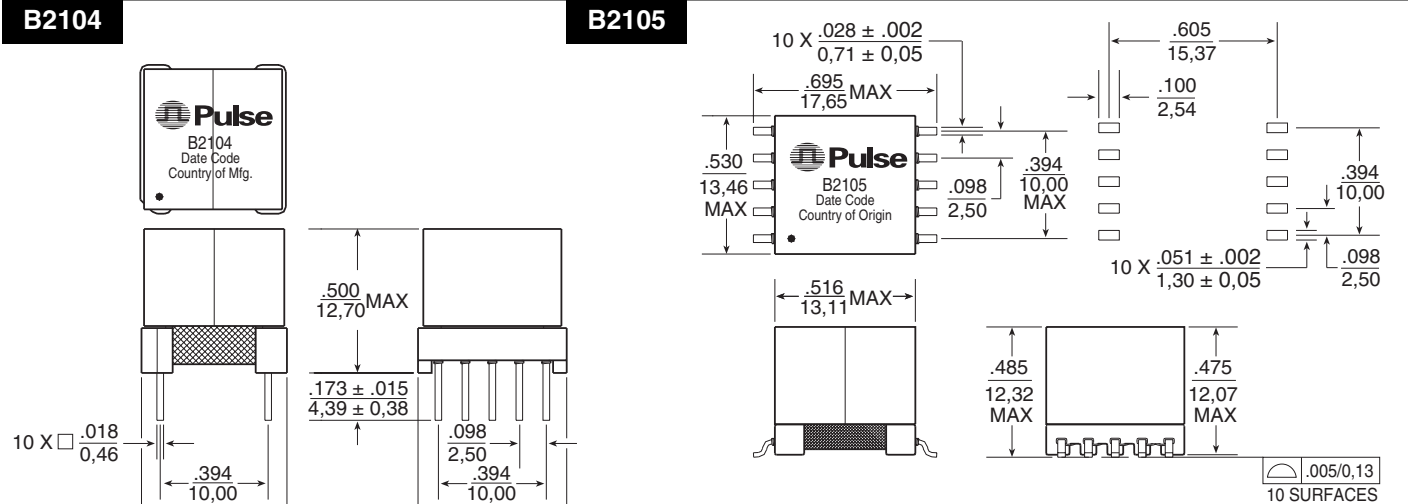

Weight 6.2 grams

Tray60/tray

Dimensions: $\frac{\text{Inches}}{\text{mm}}$ Unless otherwise specified, all tolerances are ± $\frac{.010}{0,25}$

For More Information :

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 Quick-Facts: 858 674 9672 http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 287 8998 FAX: 65 280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

